


Epiphan Recorders capture, record and stream audio/video from VGA, HDMI™, DVI or SDI sources such as HD cameras and computer displays. We offer everything from simple, portable appliances to powerful rack-mount solutions with production video switching.

**Epiphan Recorders are trusted for mission-critical deployments serving a wide range of applications including:**

- **Live Events** (concerts, conferences, seminars)
- **Corporate** (all-hands meetings, company presentations)
- **Education** (distance learning, simulations, webinars, video-on-demand)
- **Healthcare** (live procedures, monitoring equipment displays)
- **Legal** (depositions, courtroom proceedings, evidence presentation)
- **Control Centers** (power stations, emergency response, air traffic control)

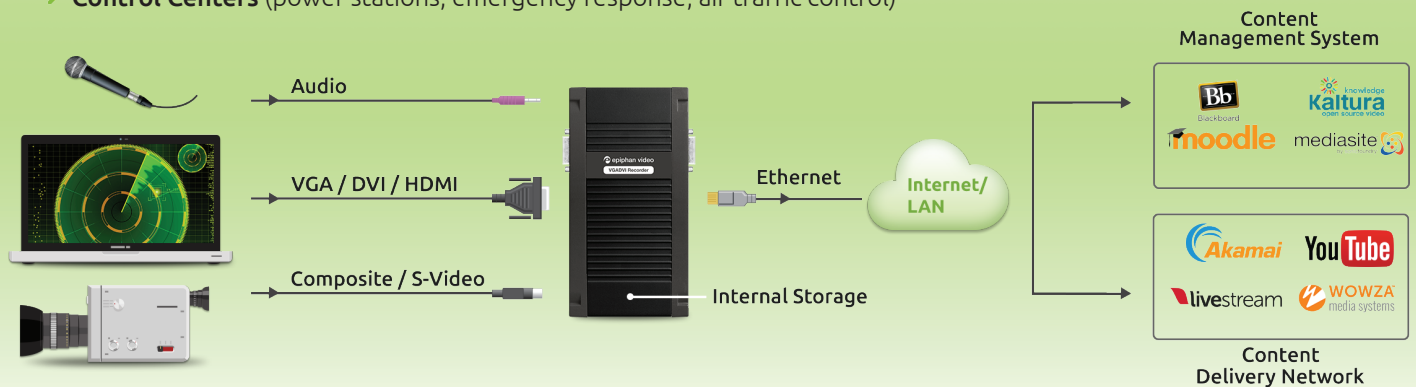

## EPIPHAN PEARL™

Self-contained, portable production video switcher. Featuring dual HDMI, SDI and VGA inputs; an LCD display for confidence monitoring, quick configuration, live switching and recording control; and ample space for storing high quality recordings. Capture, stream and record four HD channels at 30 fps.

## VGADVI RECORDER PRO™

Powerful rack-mount system with large storage capacity. VGADVI Recorder Pro simultaneously records up to four HD video sources (SDI and DVI/HDMI/VGA). Performs multi-encoding to provide multiple formats and bit rates. Highly customizable picture-in-picture layouts and branding.



### VGA / DVI / HDMI™ Display and Camera Recording:

### SDI Camera Recording:

### Audio Recording:

### Analog Video Recording (S-Video, Composite):

### Dedicated Apple Live Stream (iPhone/iPad):

### Multiple Video Sources:

### Max Resolution Supported:

### CDN Support (RTMP, RTSP):

### Capture Rate @ HD 1080p:

### Max Capture Rate:

### Storage:

	Pearl™	Lecture Recorder x2™	VGADVI Recorder™	VGADVI Recorder Pro™	VGA Grid™
VGA / DVI / HDMI™ Display and Camera Recording:	●	●	●	●	●
SDI Camera Recording:	●	-	-	●	●*
Audio Recording:	●	●	●	●	●
Analog Video Recording (S-Video, Composite):	-	●	●	●	●
Dedicated Apple Live Stream (iPhone/iPad):	●	-	-	●	●
Multiple Video Sources:	up to 4 sources	1 - 2 sources	1 - 2 sources	up to 4 sources	up to 64 sources
Max Resolution Supported:	2048×2048	1920×1200	1920×1200	2048×2048	2048×2048
CDN Support (RTMP, RTSP):	●	●	●	●	●
Capture Rate @ HD 1080p:	4 @ 30 fps or 2 @ 60 fps	30 fps	30 fps	60 fps	30 fps
Max Capture Rate:	60 fps	30 fps	30 fps	85 fps	85 fps
Storage:	1 TB	16 GB	32 GB	6 TB	6 - 24 TB

\*SDI Capture is supported on Standalone VGA Grid only

Your address and contact information here.

™ and © 2016 Epiphan Systems Inc.

Epiphan, Epiphan Video, Epiphan Systems, its products names and logos are tradenames or trademarks of Epiphan Systems Inc. All other company, interface and product names and logos are trademarks or registered trademarks of their respective owners in certain countries. Product descriptions and specifications regarding the products in this document are subject to change without notice.